



IP + IK Storm LED IP66 Weatherproof



- The Storm Weatherproof IP66 LED can be Surface Mounted on the wall and/or Suspended from the ceiling
- Wire Suspension available
- Storm is suitable for Carparks, Cool Rooms and any place that a weatherproof luminaire is required
- LED Outputs and LED Lamp Colour options available
- IP66
- IK08
- Not recommended for open rooftops
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM
- Ta: - 5°C to 35°C

Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- WS (3m Wire Suspension Kit)
- LSL-R (LSL 10a Relay) For internal use only
- LSL-SS (LSL with Switch Dim) For internal use only
- LSL-SS30 (LSL with Switch Dim and 30 Minute Turn Off) For internal use only
- 90+CRI

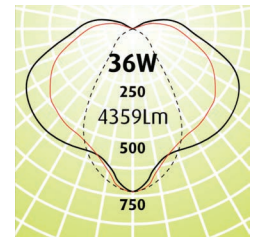


Eg Code STM-SM-1200-23w-3K




Code	Absolute Lumens	Dimensions		
		A	B	C
STM - SM - 600 - 13w - (2.7 or 3 or 4K)	1425Lm	660	685	390
STM - SM - 600 - 19w - (2.7 or 3 or 4K)	2162Lm	660	685	390
STM - SM - 1200 - 23w - (2.7 or 3 or 4K)	2850Lm	1277	1302	800
STM - SM - 1200 - 36w - (2.7 or 3 or 4K)	4359Lm	1277	1302	800

LED PRODUCT LEGEND

STM - SM - 1200 - 23W - 3K				
RANGE	MOUNTING	LENGTH	SYSTEM WATTS	LED COLOUR

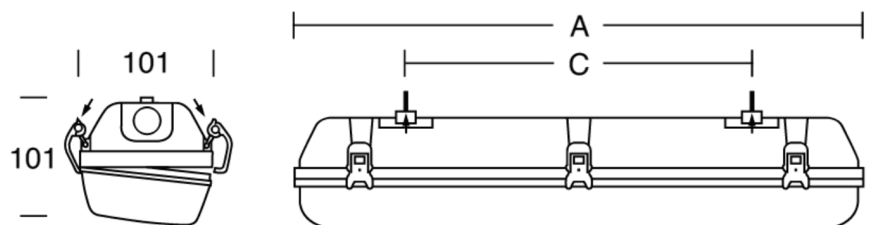

Standard Version

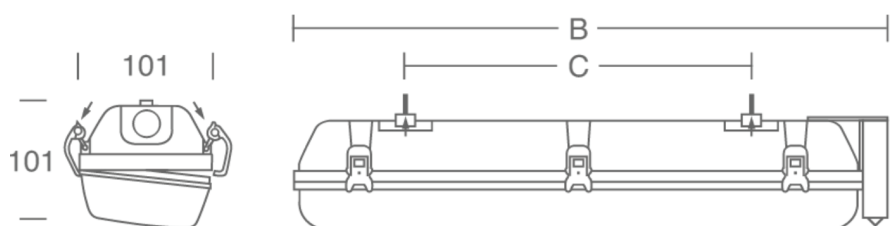

LSL Version + EM LED