



Linear 100 **Klean 44** Sealed IP44 Unit

- IP44 Plaster Recess sealed luminaire for areas such as Kitchens, Laboratories and anywhere you require a Sealed Unit
- Linear 100 has the ability to be moved small increments to miss objects in the ceiling
- Selection of optics throughout the range
- LED Outputs and LED Lamp Colour options available
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM

Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- ER (Earthquake Resistant)
- 90+CRI

Eg Code LIN-PKL-LO-1200-23W-3K

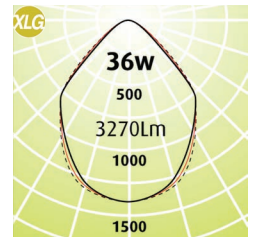


Code	Absolute Lumens		Dimensions	Plaster Cut Out
	LO	XLG	A	L x W
LIN - PKL - (LO OR XLG OR FL) - 600 - 13W - (2.7 or 3 or 4K)	1280Lm	1125Lm	630	600 x 115
LIN - PKL - (LO OR XLG OR FL) - 600 - 19W - (2.7 or 3 or 4K)	1882Lm	1656Lm	630	600 x 115
LIN - PKL - (LO OR XLG OR FL) - 600 - HO - (2.7 or 3 or 4K) ^{HO}	2130Lm	1891Lm	630	600 x 115
LIN - PKL - (LO OR XLG OR FL) - 1200 - 23W - (2.7 or 3 or 4K)	2537Lm	2232Lm	1230	1200 x 115
LIN - PKL - (LO OR XLG OR FL) - 1200 - 36W - (2.7 or 3 or 4K)	3716Lm	3270Lm	1230	1200 x 115
LIN - PKL - (LO OR XLG OR FL) - 1200 - HO - (2.7 or 3 or 4K) ^{HO}	4260Lm	3782Lm	1230	1200 x 115

LED PRODUCT LEGEND

LIN	-	PKL	-	LO	-	1200	-	23W	-	3K
RANGE		MOUNTING		DIFFUSER		LENGTH		SYSTEM WATTS		LED COLOUR



Torsion Spring / Detail

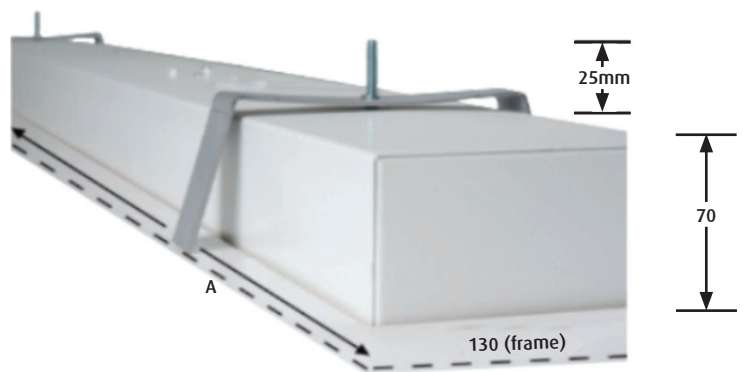

Mounting Screw / Detail