




Linear 100 **RH215 Interlock**

- Specially designed to clip in neatly to an Armstrong RH215 metal ceiling
- We are able to engineer to different ceiling types
- Width stays the same, length can vary
- Air Supply Module available
- Selection of optics throughout the range
- LED Outputs and LED Lamp Colour options available
- The Linear100 has a de-clutter options contact your local LimeLite representative for more information
- Cost effective compared to the 300 wide fittings (smaller footprint)
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM

Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- EM-LED (LED Emergency) c0 D16 / c90 D16
- EM-LED-EDALI (Monitored option) c90 D16
- ER (Earthquake Resistant)
- 90+CRI



Eg Code LIN-RH215-LO-1200-23W-3K

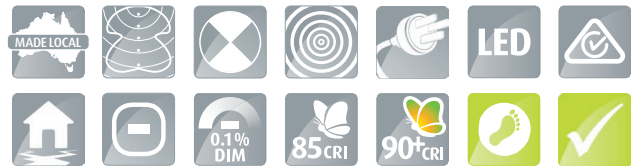


Code	Absolute Lumens	Dimensions	
	4K	A	Width
LIN - RH215 - LO - 1200 - 23W - (2.7 or 3 or 4K)	2537Lm	1197	100
LIN - RH215 - XLG - 1200 - 23W - (2.7 or 3 or 4K)	2232Lm	1197	100
LIN - RH215 - LO - 1200 - 36W - (2.7 or 3 or 4K)	3716Lm	1197	100
LIN - RH215 - XLG - 1200 - 36W - (2.7 or 3 or 4K)	3270Lm	1197	100
LIN - RH215 - LO - 1200 - HO - (2.7 or 3 or 4K) HO	4260Lm	1197	100
LIN - RH215 - XLG - 1200 - HO - (2.7 or 3 or 4K) HO	3782Lm	1197	100

Other Lengths available on request

LED PRODUCT LEGEND



Standard Version



LED Emergency Version