




Linear 100 **Single Tee-Bar**



- Linear 100 Tee-Bar is specifically designed for a teebar ceiling
- An excellent choice for Corridor Lighting easily off set
- Making design easier by having 100mm increments 2.4m, 2.5m, 2.6m on the Co plan making whatever distance user friendly
- Selection of optics throughout the range
- LED Outputs and LED Lamp Colour options available
- Wedge diffuser available
- Wall Wash version available
- The Linear100 has a de-clutter options contact your local LimeLite representative for more information
- Cost effective compared to the 300 wide fittings (smaller footprint)
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM

Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- EM-LED (LED Emergency) c0 D16 / c90 D16
- EM-LED-EDALI (Monitored option) c90 D16
- LSL-R (LSL 10a Relay)
- LSL-SS (LSL with Switch Dim)
- LSL-SS30 (LSL with Switch Dim and 30 Minute Turn Off)
- ER (Earthquake Resistant)
- 90+CRI

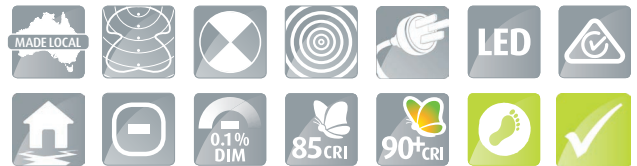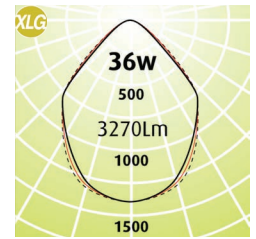



Eg Code LIN-T-LO-1200-23W-3K



Code	Absolute Lumens		Dimensions
	LO	XLG	A
LIN - T - (LO OR XLG OR FL) - 600 - 13W - (2.7 or 3 or 4K)	1280Lm	1125Lm	600
LIN - T - (LO OR XLG OR FL) - 600 - 19W - (2.7 or 3 or 4K)	1882Lm	1656Lm	600
LIN - T - (LO OR XLG OR FL) - 600 - HO - (2.7 or 3 or 4K) HTU	2130Lm	1891Lm	600
LIN - T - (LO OR XLG OR FL) - 900 - 17W - (2.7 or 3 or 4K)	1870Lm	1645Lm	900
LIN - T - (LO OR XLG OR FL) - 900 - 26W - (2.7 or 3 or 4K)	2700Lm	2376Lm	900
LIN - T - (LO OR XLG OR FL) - 1200 - 23W - (2.7 or 3 or 4K)	2537Lm	2232Lm	1200
LIN - T - (LO OR XLG OR FL) - 1200 - 36W - (2.7 or 3 or 4K)	3716Lm	3270Lm	1200
LIN - T - (LO OR XLG OR FL) - 1200 - HO - (2.7 or 3 or 4K) HTU	4260Lm	3782Lm	1200

LED PRODUCT LEGEND

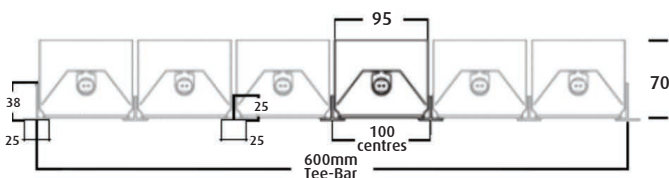

Position options along 600mm Tee-Bar

