




Surface Mount **BlockLED**

- Purpose built LED luminaire designed around LED technology
- SELV (low voltage)
- The BlockLED can be surface mounted on the wall and/or suspended from the ceiling
- Frosted, Pinch and Push diffuser for quick accessibility
- Tough injection moulded ends designed to suit 20mm conduit for through wiring, if required
- LED Outputs and LED Lamp Colour options available
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM

Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- LSL-R (LSL 10a Relay)
- LSL-SS (LSL with Switch Dim)
- LSL-SS30 (LSL with Switch Dim and 30 Minute Turn Off)
- WG (Wire Guard)
- USC (UniStrut clip)
- WS (3m Wire Suspension Kit)
- 90+CRI



Eg Code BL-SM-1200-23w-4K

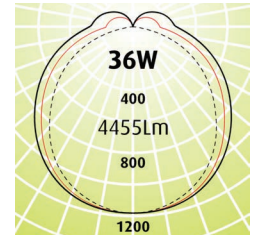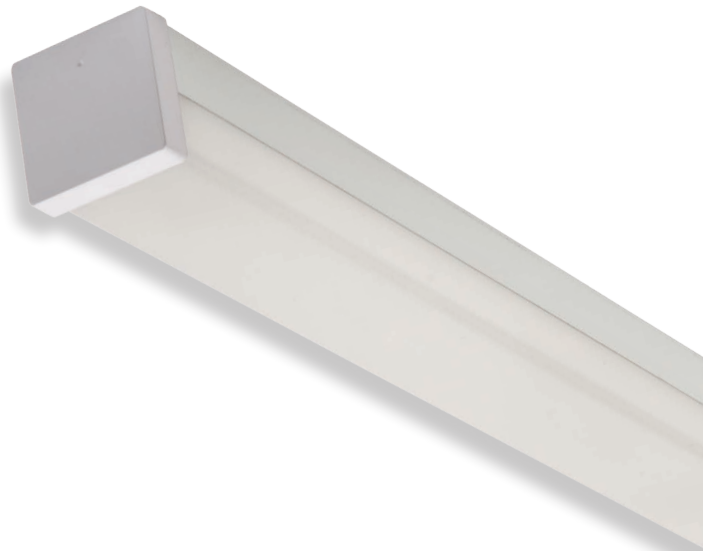

Code	Absolute Lumens	Dimensions
	4K	A
BL - SM - 600 - 14w - (2.7 or 3 or 4K)	1527Lm	607
BL - SM - 600 - 19w - (2.7 or 3 or 4K)	2190Lm	607
BL - SM - 900 - 18w - (2.7 or 3 or 4K)	2280Lm	907
BL - SM - 900 - 27w - (2.7 or 3 or 4K)	3264Lm	907
BL - SM - 1200 - 23w - (2.7 or 3 or 4K)	3117Lm	1175
BL - SM - 1200 - 36w - (2.7 or 3 or 4K)	4455Lm	1175

LED PRODUCT LEGEND

BL	- SM	- 1200	- 23W	- 4K
RANGE	MOUNTING	LENGTH	SYSTEM WATTS	LED COLOUR

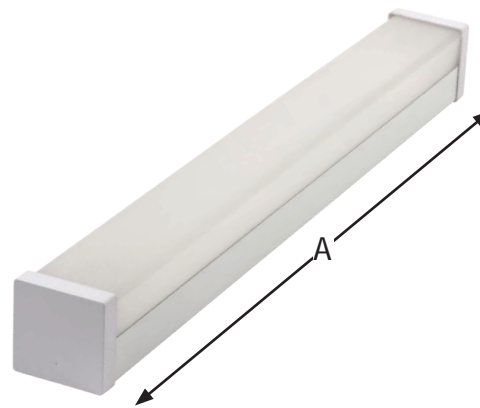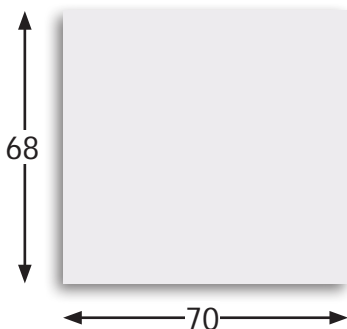

Standard Version