

# Linear 300 Plaster Recess






- Linear 300 Plaster is a recessed Luminaire, suitable for a plaster ceiling with a textured white frame
- Air Supply or air return is available
- Suits 300 wide opening where new installations or replacement of existing luminaires are required
- Also fits different thickness of ceiling (timber panels etc)
- Selection of optics throughout the range
- LED Outputs and LED Lamp Colour options available
- XLG Diffuser UGRmax: 17
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM

### Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- EM-LED (LED Emergency) c0 D20 / c90 D20
- EM-LED-EDALI (Monitored option) c90 D20
- LSL (LimeLite Sensor Light)
- AH (Air Handling)
- 90+CRI


Eg Code LIN-P300-LO-1200-23W-3K

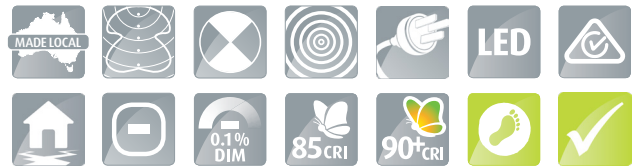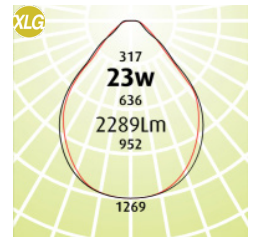


Code	Absolute Lumens		Dimensions	Plaster Cut Out
	LO	XLG	A	L x W x D
LIN - P300 - (LO OR XLG OR FL) - 600 - 13W - (2.7 or 3 or 4K)	1255Lm	1145Lm	655	585 x 220 x 82
LIN - P300 - (LO OR XLG OR FL) - 600 - 19W - (2.7 or 3 or 4K)	1837Lm	1676Lm	655	585 x 220 x 82
LIN - P300 - (LO OR XLG OR FL) - 1200 - 23W - (2.7 or 3 or 4K)	2509Lm	2289Lm	1255	1185 x 220 x 82
LIN - P300 - (LO OR XLG OR FL) - 1200 - 36W - (2.7 or 3 or 4K)	3674Lm	3352Lm	1255	1185 x 220 x 82

### LED PRODUCT LEGEND

LIN	-	P300	-	LO	-	1200	-	23W	-	3K
RANGE		MOUNTING		DIFFUSER		LENGTH		SYSTEM WATTS		LED COLOUR

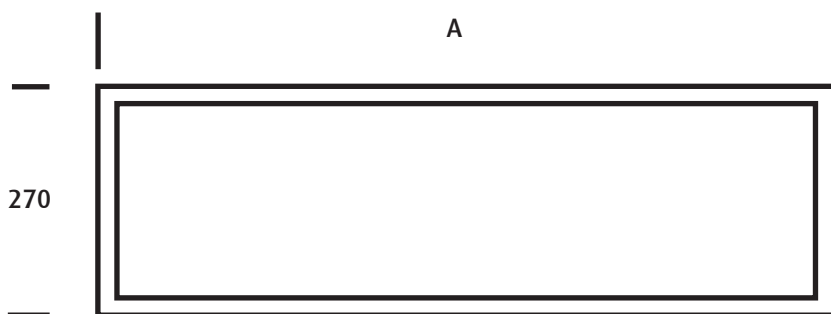

Frame Dimensions

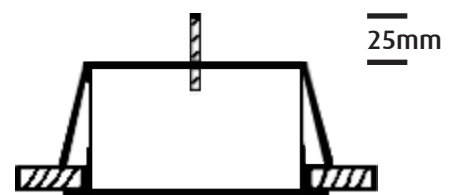

Mounting Screw