



IP + IK Storm LED Microwave Sensor



- The Storm LED IP66 Wide145 can be Surface Mounted on the wall and/or Suspended from the ceiling
- Maximum installation height: 5m
- Wire Suspension available
- Storm is suitable for Carparks, Cool Rooms and any place that a weatherproof luminaire is required
- LED Outputs and LED Lamp Colour options available
- IP66
- IK08
- Not recommended for open rooftops
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM
- Ta: - 5°C to 35°C

Options

- Dim (Dali Dimming to 1%)
- WS (3m Wire Suspension Kit)

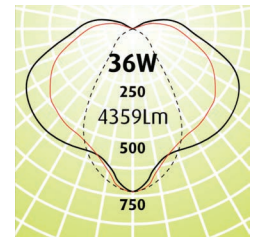


Eg Code STM-SM-1200-23w-4K-MSW145





Code	Absolute Lumens		Dimensions			
	4K		A	B	C	D
STM - SM - 1200 - 23w - (2.7 or 3 or 4K) - W145	2668Lm		1277	101	145	800
STM - SM - 1200 - 36w - (2.7 or 3 or 4K) - W145	4359Lm		1277	101	145	800

LED PRODUCT LEGEND

STM - SM - 1200 - 23W - 4K - MSW145					
RANGE	MOUNTING	LENGTH	SYSTEM WATTS	LED COLOUR	Extension

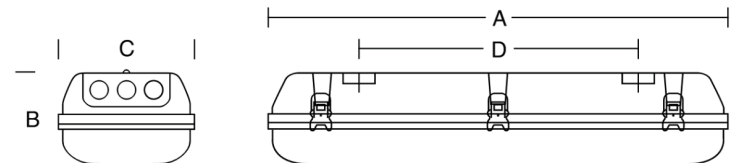

Standard Version

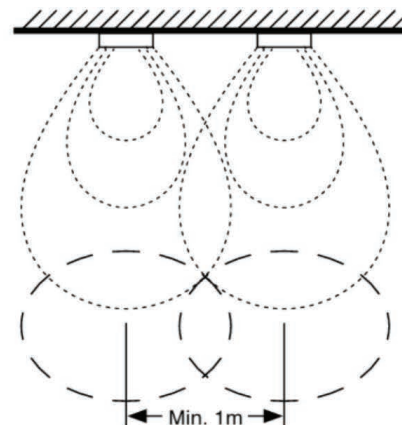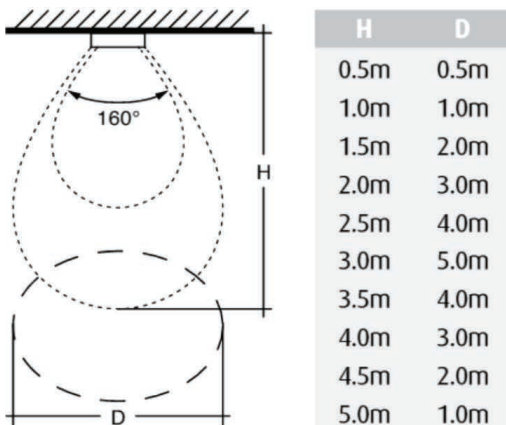

Motion Detection

Min spacing for further sensors

Setting Up		
Threshold Value	Detection Area	Switch off delay
Value Range 2 - 2000 lx; infinitely Position + Threshold value 2000 lx Position - Threshold value 2 lx	Value Range depending on installation Position + maximum detection area Position - minimum detection area	Value Range 30 s - 30 min; indefinitely Position + 30 min Position - 30 s