

Linear 300 Plaster Recess






- Linear 300 Plaster is a recessed Luminaire, suitable for a plaster ceiling with a textured white frame
- Air Supply or air return is available
- Fixed by specially designed flexi tabs that push tight against plaster ceiling
- Our 'XLG' diffuser, offers amongst the best visual comfort in the lighting market
- XLG Diffuser UGRmax: UGR<19
- Selection of optics throughout the range
- LED Outputs and LED Lamp Colour options available
- Luminaire lifetime L80/B10 >72,000hours
- MacAdams 3 SDCM

Options




- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- EM-LED (LED Emergency) c0 D20 / c90 D20
- EM-LED-EDALI (Monitored option) c90 D20
- LSL (LimeLite Sensor Light)
- AH (Air Handling)
- 90+CRI

Eg Code LIN-P300-LO-1200-23W-3K

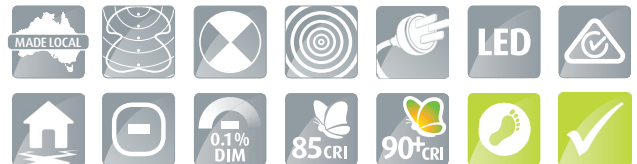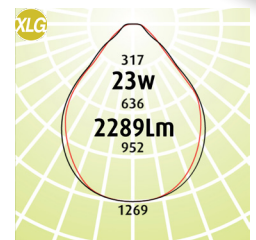

| Code | Absolute Lumens | | Dimensions | Plaster Cut Out |
|--|-----------------|--------|------------|-----------------|
| | LO | XLG | A | L x W |
| LIN - P300 - (LO OR XLG OR FL) - 600 - 13W - (2.7 or 3 or 4K) | 1255Lm | 1145Lm | 625 | 605 x 215 |
| LIN - P300 - (LO OR XLG OR FL) - 600 - 19W - (2.7 or 3 or 4K) | 1837Lm | 1676Lm | 625 | 605 x 215 |
| LIN - P300 - (LO OR XLG OR FL) - 1200 - 23W - (2.7 or 3 or 4K) | 2509Lm | 2289Lm | 1225 | 1205 x 215 |
| LIN - P300 - (LO OR XLG OR FL) - 1200 - 36W - (2.7 or 3 or 4K) | 3674Lm | 3352Lm | 1225 | 1205 x 215 |

LED PRODUCT LEGEND

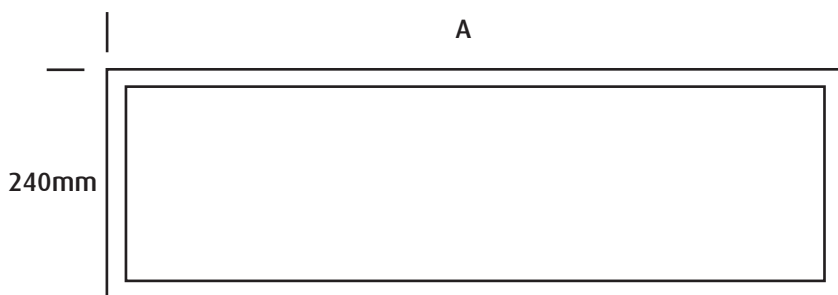

Frame Dimensions