



# Linear 100 **Surface Mount**

- Linear 100 Surface Mount is a ceiling mounted luminaire.
- Can be wire suspended to give a notable presence.
- Easily clipped onto UniStrut extrusion prewired power-in/power-out.
- Sensors and Emergencies wired in if required.
- Selection of optics throughout the range.
- LED Outputs and LED Lamp Colour options available.
- Wedge diffuser available.
- Wall Wash version available.
- Easily off set for corridor lighting.
- Cost effective compared to the 300 wide fittings. (smaller footprint)
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM

### Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- EM-LED (LED Emergency) c0 D20 / c90 D20
- EM-LED-EDALI (Monitored option) c90 D20
- LSL (LimeLite Sensor Light)
- WS (3m Wire Suspension Kit)
- USC (UniStrut Clips)
- SR (Seismic Restraints)
- 90+CRI

**Eg Code** LIN-SM-LO-1200-23W-3K

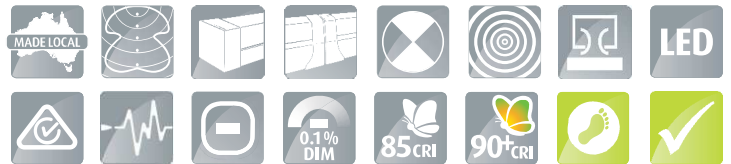

Code	Absolute Lumens		Dimensions	Extra Length
	LO	XLG	A	Sensor or EM
LIN - SM - (LO OR XLG) - 600 - 13W - (2.7 or 3 or 4K)	1612Lm	1404Lm	590	610
LIN - SM - (LO OR XLG) - 600 - 19W - (2.7 or 3 or 4K)	2356Lm	2052Lm	590	610
LIN - SM - (LO OR XLG) - 900 - 17W - (2.7 or 3 or 4K)	2108Lm	1836Lm	890	910
LIN - SM - (LO OR XLG) - 900 - 26W - (2.7 or 3 or 4K)	3224Lm	2808Lm	890	910
LIN - SM - (LO OR XLG) - 1200 - 23W - (2.7 or 3 or 4K)	2750Lm	2395Lm	1190	1210
LIN - SM - (LO OR XLG) - 1200 - 36W - (2.7 or 3 or 4K)	4464Lm	3888Lm	1190	1210

### LED PRODUCT LEGEND

LIN	-	SM	-	LO	-	1200	-	23W	-	3K
RANGE		MOUNTING		DIFFUSER		LENGTH		SYSTEM WATTS		LED COLOUR



3m adjustable wire (WS option)

