


## Description

Linear 300 Tee-Bar is specifically designed for a teebar ceiling. Air Supply or air return are available on request. Suits 300 wide Tee-Bar where new installations or replacement of existing luminaires are required.

## Features

- Linear 300 Tee-Bar is specifically designed for a teebar ceiling
- Air Supply or air return are available on request
- Suits 300 wide Tee-Bar where new installations or replacement of existing luminaires are required
- LED Outputs and LED Lamp Colour options available
- Our 'XLG' diffuser, offers amongst the best visual comfort in the lighting market
- XLG Diffuser UGR<sub>max</sub>: 17
- Selection of optics throughout the range
- Luminaire lifetime L80/B10 >72,000hours
- MacAdams 3 SDCM
- IP Rating: IP20

## Photometrics

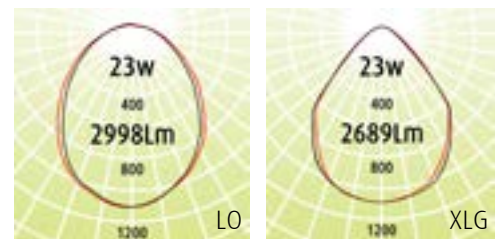

## Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- EM-LED (LED Emergency) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ C0/C90-E50(1 LUX)
- EM-LED-EDALI (Monitored option) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ C0/C90-E50(1 LUX)
- LSL (LimeLite Sensor Light)
- AH (Air Handling)
- 90+CRI

CODE	ABSOLUTE LUMENS		DIMENSIONS (A)
	LO	XLG	A
LIN - T300 - (LO or XLG) - 600 - 13W - (2.7 or 3 or 4K)	1755Lm	1573Lm	600
LIN - T300 - (LO or XLG) - 600 - 19W - (2.7 or 3 or 4K)	2565Lm	2299Lm	600
LIN - T300 - (LO or XLG) - 1200 - 23W - (2.7 or 3 or 4K)	2998Lm	2689Lm	1200
LIN - T300 - (LO or XLG) - 1200 - 36W - (2.7 or 3 or 4K)	4861Lm	4356Lm	1200