





SQUARE SURFACE MOUNT

Square - 600

Standard with
Emergency or Sensor Option Dimensions

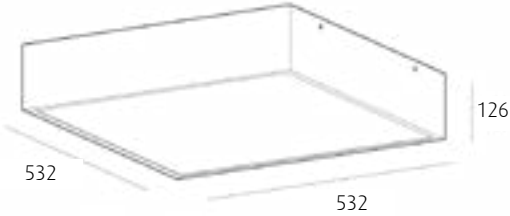

Mounting dimensions





Description

Square 600 Surface mount designed to sit flush on the ceiling with a textured white body. Delivering high quality illumination with great uniformity. Optional extras – Clutter free the ceiling. Add Emergency + Sensor, the encapsulated devices designed to blend in with our luminaries. One point of contact and no switch required for the wall.

Features

- Square 600 Surface mount designed to sit flush on the ceiling with a textured white body.
- Supplied with a 2m flex and plug for quick and easy installation
- Selection of optics throughout the range
- LED Outputs and LED Lamp Colour options available
- XLG Diffuser UGRmax: 16
- LO Diffuser URGmax: 22
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM
- IP rating IP20

Photometrics

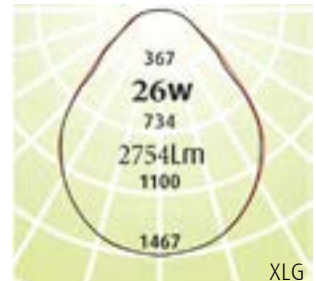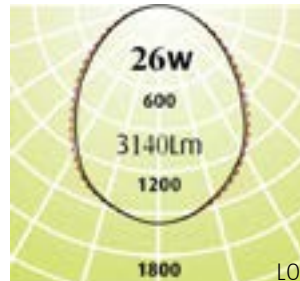

Options

- Ultra Dim (Extra Low Dimming to 0.1%)
- Dim (Dali Dimming to 1%)
- EM-LED (LED Emergency) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ CO/C90-E50 (1 LUX)
- EM-LED-EDALI (Monitored option) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ CO/C90-E50 (1 LUX)
- LSL (LimeLite Sensor Light)
- 90+CRI (COI Compliant)



CODE	ABSOLUTE LUMENS	DEPTH (A)	DIMENSIONS (L X W)
SQ - SM - LO - 600 - 21W - (3K or 4K)	2613 lm	126mm	532 x 532 mm
SQ - SM - XLG - 600 - 21W - (3K or 4K)	2211 lm	126mm	532 x 532 mm
SQ - SM - LO - 600 - 26W - (3K or 4K)	3140 lm	126mm	532 x 532 mm
SQ - SM - XLG - 600 - 26W - (3K or 4K)	2754 lm	126mm	532 x 532 mm
SQ - SM - LO - 600 - 29W - (3K or 4K)	3645 lm	126mm	532 x 532 mm
SQ - SM - XLG - 600 - 29W - (3K or 4K)	3086 lm	126mm	532 x 532 mm