



Description

Linear 100 Tee-Bar is specifically designed for a Tee-bar ceiling. An excellent choice for corridor lighting easily off set. Making design easier by having 100mm increments 2.4m, 2.5m, 2.6m on the Co plan making any distance user friendly. Selection of optics throughout the range. Optional extras – Clutter free the ceiling. Add Emergency + sensor, the encapsulated devices designed to blend in with our luminaires. One point of contact and no switch required for the wall.



Features

- Linear 100 Tee-Bar is specifically designed for a teebar ceiling.
- An excellent choice for corridor lighting, easily off set.
- Design easier by having 100mm increments 2.4m, 2.5m, 2.6m on the Co plan making making any distance user friendly.
- Selection of optics throughout the range.
- LED Outputs and LED Lamp Colour options available.
- LED CRI >80 as standard
- LED 90+ CRI available on request
- Seismic Restraints available on request
- Cost effective compared to 300 wide fitting (smaller carbon footprint)
- Luminaire lifetime L80/B10 >72,000hours
- MacAdams 3 SDCM
- IP Rating: IP20


Options

- 90+CRI
- CAS (Casambi)
- DIM (Dali Dimming to 1%)
- EM-LED (LED Emergency) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ C0/C90-E50 (1 LUX)
- EM-LED-DALI (Monitored option) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ C0/90-E50 (1 LUX)
- LSL (LimeLite Sensor Light)
- SR (Seismic Restraints)
- ULTRA DIM (Extra Low Dimming to 0.1%)

Photometrics

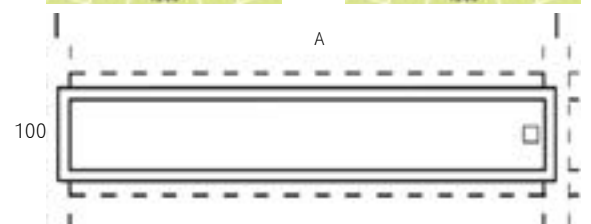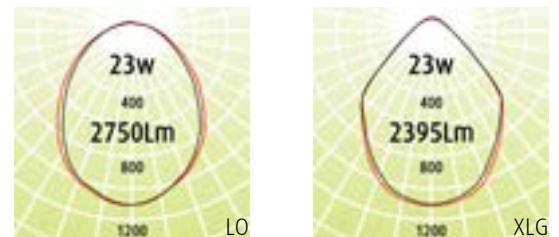

Position options along 600mm Tee-Bar

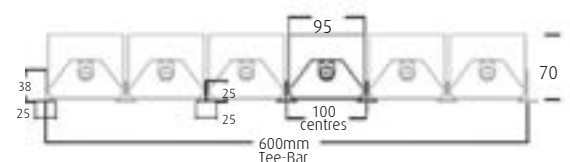

Code	Absolute Lumens		Depth
	LO	XLG	A
LIN - T - (LO or XLG) - 600 - 13w - (2.7 or 3 or 4K)	1612Lm	1404Lm	600
LIN - T - (LO or XLG) - 600 - 19w - (2.7 or 3 or 4K)	2356Lm	2052Lm	600
LIN - T - (LO or XLG) - 900 - 17w - (2.7 or 3 or 4K)	2108Lm	1836Lm	900
LIN - T - (LO or XLG) - 900 - 26w - (2.7 or 3 or 4K)	3224Lm	2808Lm	900
LIN - T - (LO or XLG) - 1200 - 23w - (2.7 or 3 or 4K)	2750Lm	2395Lm	1200
LIN - T - (LO or XLG) - 1200 - 36w - (2.7 or 3 or 4K)	4464Lm	3888Lm	1200