


Mounting Screw / Detail



Description

Linear 100 KClean 44 are IP44 Plaster Recess sealed luminaire designed for areas such as kitchens, laboratories and anywhere you require a sealed unit. Linear 100 has the ability to be moved small increments to miss objects in the ceiling.


Features

- IP44 Plaster Recess sealed luminaire for areas such as kitchens, laboratories and anywhere you require a sealed unit.
- Linear 100 has the ability to be spaced in small increments within the ceiling.
- Suitable for a plaster ceiling with a textured white frame.
- Dulux Mannex White powdercoat (standard)
- Suits 10mm-13mm ceiling thickness
- Selection of optics throughout the range
- LED Outputs and LED Lamp Colour options available
- LED CRI >80 as standard
- LED 90+ CRI available on request
- Seismic Restraints available on request
- Luminaire lifetime L80/B10 >72,000hours
- MacAdams 3 SDCM
- IP Rating: IP44

Options

- 90+CRI
- CAS (Casambi)
- Dim (Dali Dimming to 1%)
- LSL (LimeLite Sensor Light)
- SR (Seismic Restraints)

Photometrics

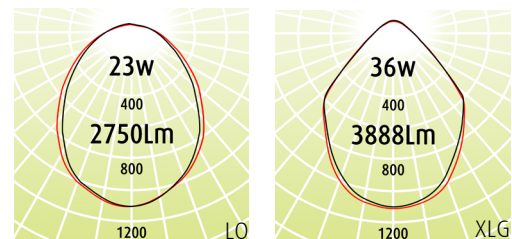

Code	Absolute Lumens		Dimensions	Plaster Cut Out
	LO	XLG	A	L x W
LIN - PKL - (LO or XLG) - 600 - 13w - (3 or 4K)	1612Lm	1404Lm	630	600 x 115
LIN - PKL - (LO or XLG) - 600 - 19w - (3 or 4K)	2356Lm	2052Lm	630	600 x 115
LIN - PKL - (LO or XLG) - 1200 - 23w - (3 or 4K)	2750Lm	2395Lm	1230	1200 x 115
LIN - PKL - (LO or XLG) - 1200 - 36w - (3 or 4K)	4464Lm	3888Lm	1230	1200 x 115