


Description

Linear 300 Plaster Recess is a recessed Luminaire, suitable for a plaster ceiling with a textured white frame. Air Supply or air return is available. Custom frames available for existing cut outs. Optional extras – Clutter free the ceiling. Add Emergency + sensor, the encapsulated devices designed to blend in with our luminaires. One point of contact and no switch required for the wall.

Features

- Linear 300 Plaster is a recessed Luminaire, suitable for a plaster ceiling with a textured white frame
- Air Supply or air return is available on request
- Fixed by specially designed flexi tabs that push tight against plaster ceiling.
- LED Outputs and LED Lamp Colour options available
- Our 'XLG' diffuser, offers amongst the best visual comfort in the lighting market
- XLG Diffuser UGRmax: 17
- Selection of optics throughout the range
- Luminaire lifetime L80/B10 >72,000hours
- MacAdams 3 SDCM
- IP Rating: IP20

Photometrics

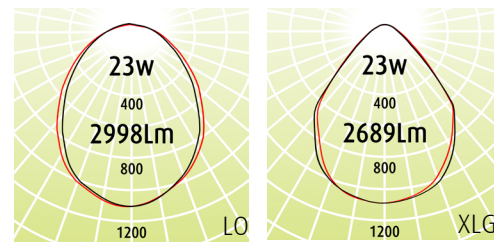

Options

- AH (Air Handling)
- 90+CRI
- CAS (Casambi)
- DIM (DALI Dimming to 1%)
- EM-LED (LED Emergency) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ CO/C90-E50 (1 LUX)
- EM-LED-DALI (Monitored option) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ CO/90-E50 (1 LUX)
- LSL (LimeLite Sensor Light)
- SR (Seismic Restraints)

CODE	ABSOLUTE LUMENS		DEPTH (A)	DIMENSIONS (L X W)
	LO	XLG	A	L x W
LIN - P300 - (LO or XLG) - 600 - 13W - (3 or 4K)	1755Lm	1573Lm	625	605 x 215
LIN - P300 - (LO or XLG) - 600 - 19W - (3 or 4K)	2565Lm	2299Lm	625	605 x 215
LIN - P300 - (LO or XLG) - 1200 - 23W - (3 or 4K)	2998Lm	2689Lm	1225	1205 x 215
LIN - P300 - (LO or XLG) - 1200 - 36W - (3 or 4K)	4861Lm	4356Lm	1225	1205 x 215