




SQUARE PLASTER

Square - 600

Standard Frame with
Emergency or Sensor Option Dimensions

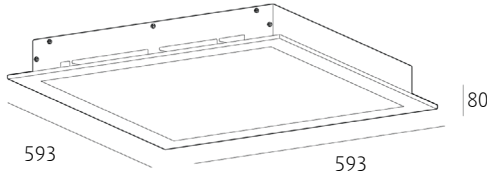

Plaster Cut out Dimensions



Description

Square 600 Plaster is a recessed Luminaire, suitable for a plaster ceiling with a textured white frame. Air Handling available on two or four sides. Delivering high quality illumination with great uniformity. Optional extras - Clutter free the ceiling. Add Emergency + sensor, the encapsulated devices designed to blend in with our luminaires. One point of contact and no switch required for the wall.



Features

- Square 600 Plaster is a recessed Luminaire, suitable for a plaster ceiling with a textured white frame
- Supplied with a 2m flex and plug for quick and easy installation
- Air Handling available on two or four sides enables Sensors or Emergency or both in the design
- Selection of optics throughout the range
- LED Outputs and LED Lamp Colour options available
- Seismic Restraints available on request
- XLG Diffuser UGRmax: 16
- LO Diffuser UGRmax: 22
- Luminaire lifetime L80/B10 >60,000hours
- MacAdams 3 SDCM
- IP rating IP20

Options

- 90+CRI (COI Compliant)
- AH (Air Handling)
- CAS (Casambi)
- DIM (Dali Dimming to 1%)
- EM-LED (LED Emergency) CO-D20 (0.2 LUX)/C90-E50 (0.2 LUX)/ CO/C90-E50 (1 LUX)
- EM-LED-DALI (Monitored option) CO-D20 (0.2 LUX) /C90-E50 (0.2 LUX) / CO/90-E50 (1 LUX)
- LSL (LimeLite Sensor Light)
- SR (Seismic Restraints)

Photometrics

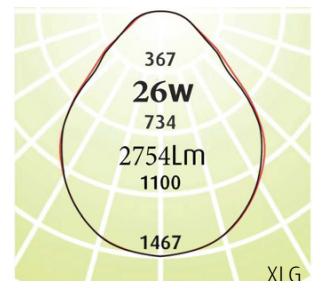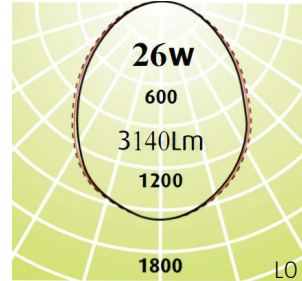

| CODE | ABSOLUTE LUMENS | DEPTH (A) | PLASTER CUT OUT (L X W) |
|---------------------------------------|-----------------|-----------|-------------------------|
| SQ - P - LO - 600 - 21W - (3K or 4K) | 2613 lm | 80mm | 530 x 530 mm |
| SQ - P - XLG - 600 - 21W - (3K or 4K) | 2211 lm | 80mm | 530 x 530 mm |
| SQ - P - LO - 600 - 26W - (3K or 4K) | 3140 lm | 80mm | 530 x 530 mm |
| SQ - P - XLG - 600 - 26W - (3K or 4K) | 2754 lm | 80mm | 530 x 530 mm |
| SQ - P - LO - 600 - 29W - (3K or 4K) | 3645 lm | 80mm | 530 x 530 mm |
| SQ - P - XLG - 600 - 29W - (3K or 4K) | 3086 lm | 80mm | 530 x 530 mm |